





*ADVANCED TECHNOLOGY
FROM GERMANY*



Double Stage Screw Air Compressor

UP TO
40%
energy saving

- 1 Average PM motor can save 7%-11%**
- 2 Reduce pressure can save 8%-1bar**
- 3 Save unload state and less power**

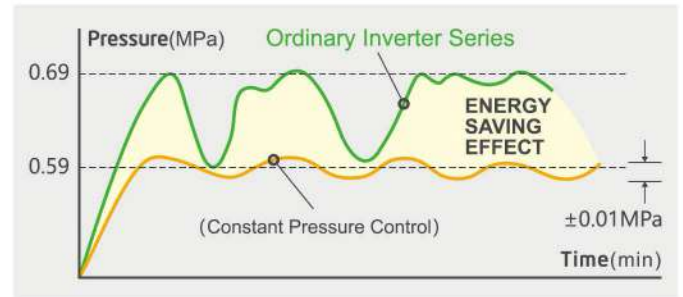
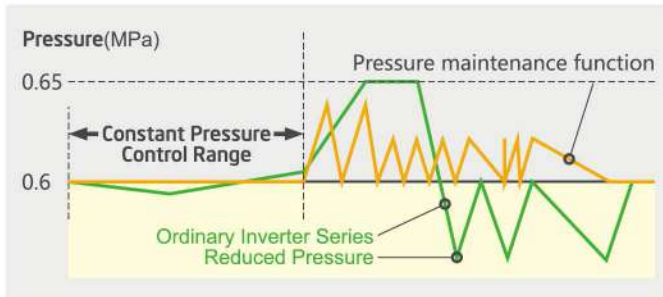


Model	Motor power		Free air deliver (m3/min)	Discharge pressure (Bar)	Outlet Pipe (INCH)	Drive Mode	Weight (KG)	Dimension (mm)
	(KW)	(HP)						
GD-20APM-II	15	20	2.9	8	1-1/2 "	DIRECT	780	1480*850*1180
			2.4	10				
			2.2	12				
GD-25APM-II	18.5	25	3.5	8	1-1/2 "	DIRECT	780	1480*850*1180
			2.9	10				
			2.5	12				
GD-30APM-II	22	30	4.1	8	1-1/2 "	DIRECT	780	1480*850*1180
			3.5	10				
			3.2	12				
GD-40APM-II	30	40	6.4	8	2 "	DIRECT	1080	1720*1110*1480
			4.9	10				
			4.2	12				
GD-50APM-II	37	50	7.1	8	2 "	DIRECT	1080	1720*1110*1480
			6.3	10				
			5.4	12				
GD-60APM-II	45	60	9.7	8	2 "	DIRECT	1080	1720*1110*1480
			7.8	10				
			6.5	12				
GD-75APM-II	55	75	12.5	8	2 1/2"	DIRECT	2080	2100*1350*1720
			9.6	10				
			8.6	12				
GD-100APM-II	75	100	16.5	8	2 1/2"	DIRECT	2080	2100*1350*1720
			12.5	10				
			11.2	12				
GD-125APM-II	90	125	19.8	8	DN65	DIRECT	3280	2460*1700*1900
			16.9	10				
			14.3	12				
GD-150APM-II	110	150	23.5	8	DN65	DIRECT	3480	2460*1700*1900
			19.7	10				
			17.6	12				
GD-175APM-II	132	175	28	8	DN80	DIRECT	3980	2900*1800*2020
			23.5	10				
			19.8	12				
GD-220APM-II	160	220	33.6	8	DN80	DIRECT	4280	2900*1800*2020
			30	10				
			23.8	12				
GD-250APM-II	185	250	38.4	8	DN100	DIRECT	5450	2900*1800*2020
			32.5	10				
			28.6	12				

Permanent Magnet VSD Screw Air Compressor

UP TO
30%
energy saving

- 1 Average PM motor can save 7%-11%**
- 2 Reduce pressure can save 8%-1bar**
- 3 Save unload state**

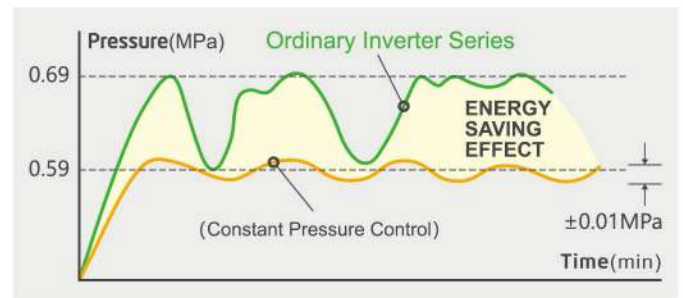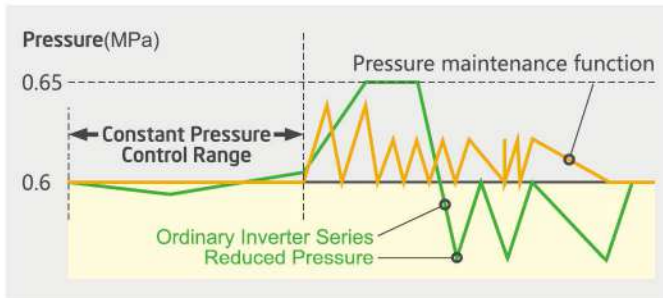

Model	Motor power		Free air deliver (m3/min)	Discharge pressure (Bar)	Outlet Pipe (INCH)	Drive Mode	Weight (KG)	Dimension (mm)
	(KW)	(HP)						
GD-10APM	7.5	10	1.1	8	1/2 "	DIRECT	240	900*700*920
			0.95	10				
			0.8	12				
GD-15APM	11	15	1.5	8	3/4 "	DIRECT	400	1080*750*1000
			1.3	10				
			1.1	12				
GD-20APM	15	20	2.3	8	3/4 "	DIRECT	400	1080*750*1000
			2.1	10				
			1.72	12				
GD-25APM	18.5	25	3	8	1 "	DIRECT	500	1280*850*1160
			2.7	10				
			2.4	12				
GD-30APM	22	30	3.6	8	1 "	DIRECT	550	1280*850*1160
			3.2	10				
			2.7	12				
GD-40APM	30	40	5	8	1 "	DIRECT	600	1280*850*1160
			4.5	10				
			4	12				
GD-50APM	37	50	6.2	8	1-1/2 "	DIRECT	800	1400*1000*1290
			5.6	10				
			5	12				
GD-60APM	45	60	7	8	1-1/2 "	DIRECT	800	1400*1000*1290
			6.2	10				
			5.6	12				
GD-75APM	55	75	9.6	8	2 "	DIRECT	1660	1800*1230*1570
			8.5	10				
			7.6	12				
GD-100APM	75	100	12.6	8	2 "	DIRECT	1800	1800*1230*1570
			11.2	10				
			10	12				
GD-125APM	90	125	15	8	2 "	DIRECT	1900	1800*1230*1570
			13.8	10				
			12.3	12				
GD-150APM	110	150	19.8	8	2 1/2 "	DIRECT	2500	2400*1470*1840
			17.4	10				
			14.8	12				



Fixed Speed Screw Air Compressor



Model	Motor power		Free air deliver (m3/min)	Discharge pressure (Bar)	Outlet Pipe (INCH)	Drive Mode	Weight (KG)	Dimension (mm)
	(KW)	(HP)						
GD-10A	7.5	10	1.1	8	1/2 "	DIRECT	240	900*700*920
			0.95	10				
			0.8	12				
GD-15A	11	15	1.5	8	3/4 "	DIRECT	400	1080*750*1000
			1.3	10				
			1.1	12				
GD-20A	15	20	2.3	8	3/4 "	DIRECT	400	1080*750*1000
			2.1	10				
			1.72	12				
GD-25A	18.5	25	3	8	1 "	DIRECT	500	1280*850*1160
			2.7	10				
			2.4	12				
GD-30A	22	30	3.6	8	1 "	DIRECT	550	1280*850*1160
			3.2	10				
			2.7	12				
GD-40A	30	40	5	8	1 "	DIRECT	600	1280*850*1160
			4.5	10				
			4	12				
GD-50A	37	50	6.2	8	1-1/2 "	DIRECT	800	1400*1000*1290
			5.6	10				
			5	12				
GD-60A	45	60	7	8	1-1/2 "	DIRECT	800	1400*1000*1290
			6.2	10				
			5.6	12				
GD-75A	55	75	9.6	8	2 "	DIRECT	1660	1800*1230*1570
			8.5	10				
			7.6	12				
GD-100A	75	100	12.6	8	2 "	DIRECT	1800	1800*1230*1570
			11.2	10				
			10	12				
GD-125A	90	125	15	8	2 "	DIRECT	1900	1800*1230*1570
			13.8	10				
			12.3	12				
GD-150A	110	150	19.8	8	2 1/2"	DIRECT	2500	2400*1470*1840
			17.4	10				
			14.8	12				
GD-175A	132	175	23.2	8	2 1/2"	DIRECT	2700	2400*1470*1840
			20.5	10				
			17.4	12				
GD-220A	160	220	27.6	8	2 1/2"	DIRECT	3000	2400*1470*1840
			24.6	10				
			21.5	12				
GD-250A	185	250	30.4	8	DN 80	DIRECT	3500	3150*1980*2150
			27.4	10				
			24.8	12				

Distributor: